



The **Mr Slim multi-split system** is an ideal option for open plan spaces in medium sized premises such as offices or shops where two units are required. These can be Mr Slim ceiling cassettes (PLA-ZRP), ceiling suspended (PCA-RP), ducted (PEAD-RP) or wall mounted (PKA-RP) models and can be connected to a single outdoor unit using twin multi distributor pipes.


- Two indoor heat pump units can be operated in a Multi-Split configuration from a single outdoor unit
- Heat pumps must operate in same heating or cooling mode
- Inverter controlled outdoor unit with low starting current

PUHZ-ZRP125VKA/YKA		Single Phase	Three Phase
CAPACITY (kW)	Heating (nominal)	14.0 (5.0 - 16.0)	
	Cooling (nominal)	12.5 (5.5 - 14.0)	
	Heating (UK)	11.9 (4.25 - 13.6)	
	Cooling (UK)	11.5 (5.05 - 12.9)	
SOUND PRESSURE LEVEL (dBA) Heating / Cooling		52	50
SOUND POWER LEVEL (dBA) Cooling		70	
WEIGHT (kg)		116	126
DIMENSIONS (mm)	Width	1050	
	Depth	330 + 30	
	Height	1338	
ELECTRICAL SUPPLY		220-240v, 50Hz	380-415v, 50Hz
PHASE		Single	3
STARTING CURRENT (A)		12	4
MAX RUNNING CURRENT (A)		27.3	10.3
FUSE RATING (BS88) - HRC (A)		32	16
MAINS CABLE No. CORES		3	5
MAX PIPE LENGTH (m)		75	
MAX HEIGHT DIFFERENCE (m)		30	
CHARGE R410A (kg) - 30m		5.0	

Applicable Combinations

2 x Size 60 Indoor units

MSDD-50TR-E Pipe Kit

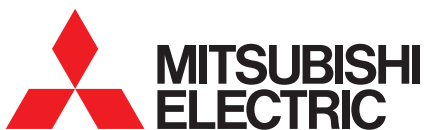

LIVING ENVIRONMENTAL SYSTEMS

Air Conditioning | Heating
Ventilation | Controls