## Air Conditioning

### **Product Information**

PEAD-RP35JAQ (Single Phase)
Power Inverter Heat Pump
Ceiling Concealed Ducted System

Making a World of Difference



Our wide range of Power Inverters offer customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation.

### **Key Features**

- Reduced height entire range only 250mm
- Wider range of external static pressure settings across entire range
- Drain pump included as standard





Air Conditioning | Heating Ventilation | Controls



## **Product Information**

PEAD-RP35JAQ (Single Phase) **Power Inverter Heat Pump** Ceiling Concealed Ducted System


Making a World of Difference

# Air Conditioning


PEAD-RP - INDOOR UNITS		PEAD-RP35JAQ
CAPACITY (kW)	Heating (nominal)	4.1 (1.6-5.2)
	Cooling (nominal)	3.6 (1.6-4.5)
	Heating (UK)	3.5 (1.35-4.4)
	Cooling (UK)	3.3 (1.45-4.15)
SHF (nominal & UK)		0.85
COP / EER (nominal)		4.32 / 4.04
SCOP / SEER (BS EN14825)		4.0 / 5.6
ErP ENERGY EFFICIENCY CLAS	S Heating/Cooling	A+ / A+
AIRFLOW (I/s)	Lo-Mi-Hi	167-200-233
PIPE SIZE mm (in)	Gas	12.7 (1/2")
	Liquid	6.35 (1/4")
EXTERNAL STATIC PRESSURE (Pa)		35-50-70-100-150
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Mi2-Mi3-Hi	23-27-30
SOUND POWER LEVEL (dBA)		52
DIMENSIONS (mm)	Width x Depth x Height	900 x 732 x 250
WEIGHT (kg)		26
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4

PUHZ-ZRP - OUTDOOR UNITS		PUHZ-ZRP35VKA
SOUND PRESSURE LEVEL (dBA) Heating/Cooling		46 / 44
SOUND POWER LEVEL (dBA) Heating/Cooling		65
WEIGHT (kg)		43
DIMENSIONS (mm)	Width x Depth x Height	809 x 300 x 630
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.95 / 0.89
	Heating/Cooling (UK)	0.79 / 0.81
STARTING CURRENT (A)		4.0
SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]		4.45 / 4.18 [14.1]
FUSE RATING (BS88) - HRC (A)		16
MAINS CABLE No. Cores		3
MAX PIPE LENGTH (m)		50
MAX HEIGHT DIFFERENCE (m)		30
CHARGE R410A (kg) - 30m		2.2



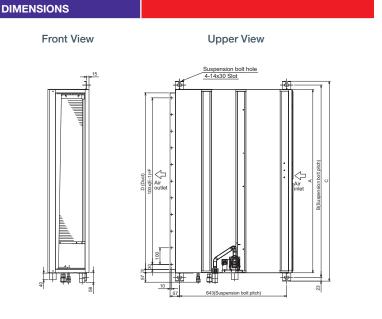

Side View



PEAD-RP35JAQ 900 954 1000 860



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)


keiny variation in technical specification to the equipment described, or to written are represented the environment of the company reserves the keiny variation in technical specification to the equipment described, or to written are replaced products without prior notification or public announcement. Missibishi Electric is constaintly developing ring its products. All descriptions, illustrations, chavings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to mys General Controllers of Sales, a copy of which is available on request. Third-party product and brand manners may be trademarks or registered trademarks of their respective owners.













Mitsubishi Electric UK's commitment to the environment





